



User's Manual v2.0

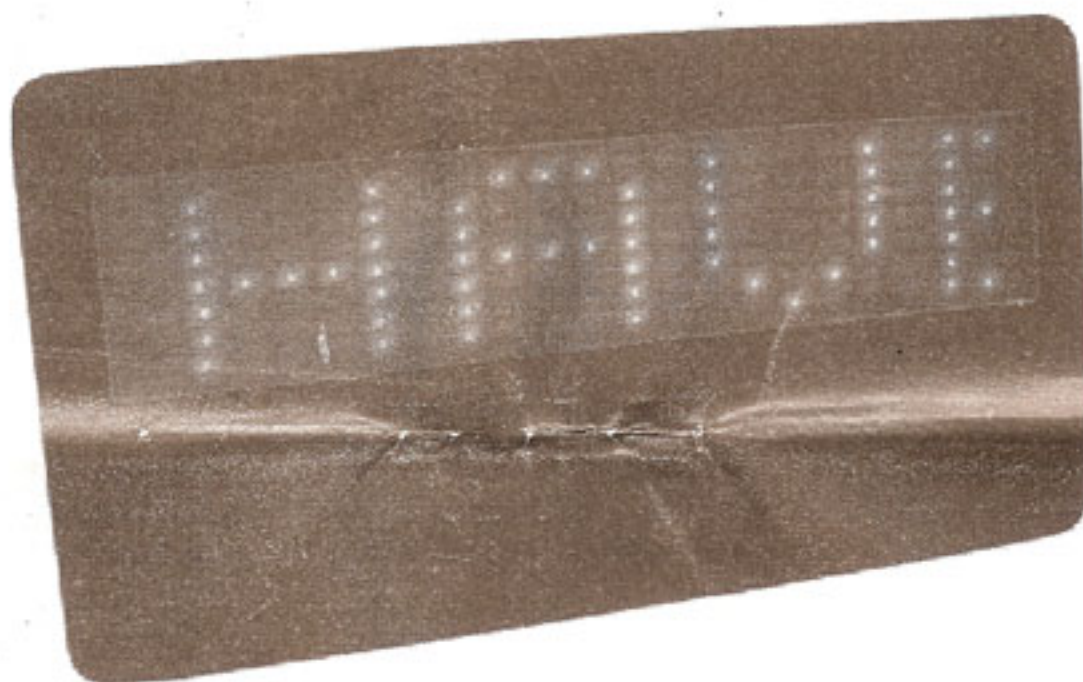

1. Power switch is ON/OFF (ENTER).
2. Badge can store 6 messages (1 can store 512 characters, 2-6 can store 256 characters).
3. You can use one CR2032 or two CR2016s as power supply. Change battery when the brightness isn't enough or can't display.

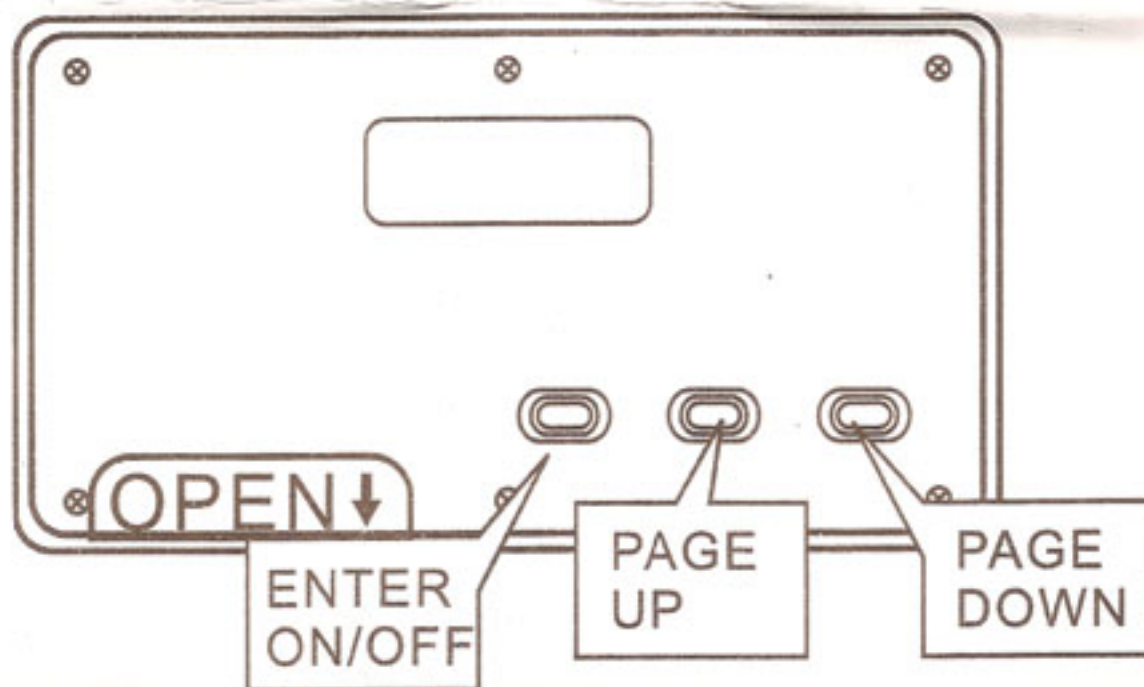

Key-pressing Information:

In the natural display, when you press the P-U key, it shows you to start operating the badge and coming into the first grade menu, the key-pressing control procedure:


Adjust 'P-U' or 'P-D' to select: the switch display info (SWITCH), the input text (INPUT),

move-left speed (SPEED), brightness control (LUM).

Then press ENTER key to come into second grade menu:


A. SWITCH: Choice menu (Total 6 pages), choose the display information.

- 1) Enter choice menu, press 'ENTER' when display SWITCH.
- 2) The right of display show the current data (1-6), by 'P-U' or 'P-D' adjust the number between 1-6, press 'ENTER' when you select, the display will exit the operation and begin to show the information you inputted.

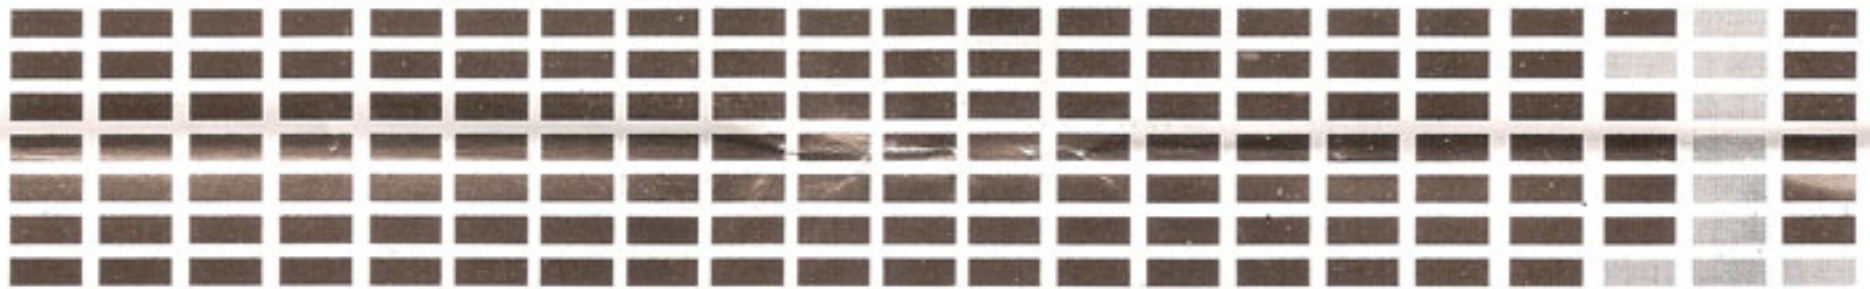

B. INPUT: Input the content of the text (input the text newly).

- 1) Enter choice menu, press 'ENTER' when the display show 'INPUT' by 'P-U' or 'P-D'.
- 2) The right show the character, input character by 'P-U' or 'P-D', press 'ENTER' after finish.
- 3) If you need to delete a character, press 'ENTER' for 5 seconds, the character is deleted when the display resumed to still state.

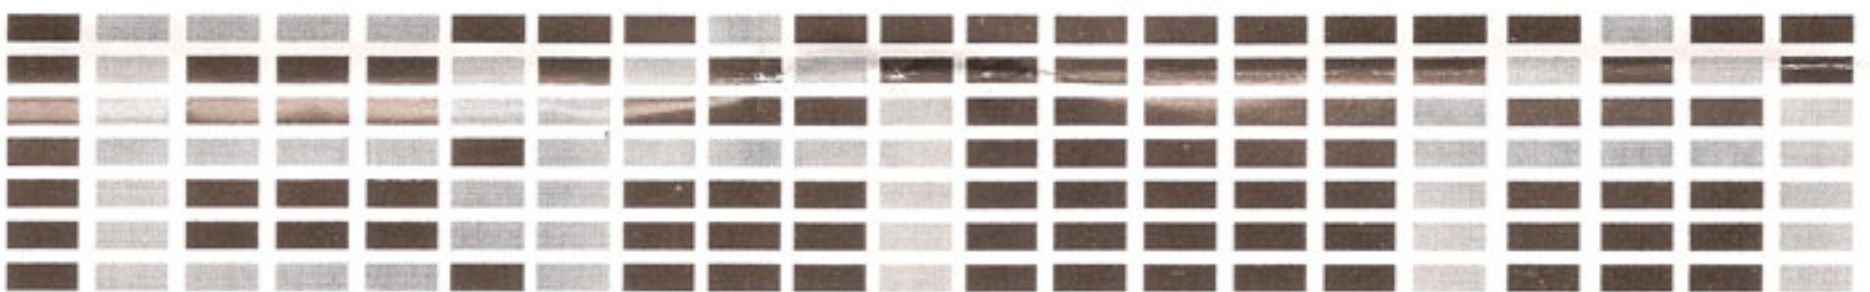

- 4) Press 'P-D' for 3 seconds or wait for 15 seconds, the display will exit operation and show the message.

C. SPEED: Adjust the move speed (the number is larger, the speed is faster).

- 1) Enter choice menu, show SPEED by P-U or P-D (1-9), then press 'ENTER'.
- 2) The number on the right is for the speed, adjust the number by P-U or P-D, press 'ENTER' to confirm.

D. LUM: Adjust the luminance (The number is larger, the luminance is higher)

- 1) Enter choice menu, adjust menu by 'P-D' or 'P-U' when it show LUM, press 'ENTER'.
- 2) The number on the right show the brightness grade, adjust the number between 1-9 by 'P-U' or 'P-D', press 'ENTER' after finish adjusting.